

General Industrial Spring Driven Reels

Series RT

Reelcraft's Series RT is a new, lighter, spring-driven hose reel with a composite spool designed for applications that are less demanding, yet require a product that can withstand industrial use.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)	Price
RT435-OLP	1/4"	35'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	21	\$154.00
RT450-OLP	1/4"	50'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	24	\$185.00
RT635-OLP	3/8"	35'	300	1/4"	3/8"	16 1/2 x 5 3/4 x 17 7/8	21	\$174.00
RT650-OLP	3/8"	50'	300	1/4"	1/2"	16 1/2 x 6 1/4 x 17 7/8	27	\$224.00
RT835-OLP	1/2"	35'	300	1/2"	1/2"	16 1/2 x 6 1/4 x 17 7/8	27	\$236.00
RT850-OLP	1/2"	50'	300	1/2"	1/2"	16 1/2 x 7 3/4 x 17 7/8	37	\$302.00




Series RT
RT650-OLP
Patent No. 7,150,425

Heavy Duty Industrial Spring Driven Reels

Series 7000

Reelcraft's Series 7000 is ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and are engineered with structural forms and gussets to yield the greatest amount of strength.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)	Price
Low Pressure Air/Water Reels			Maximum temperature 150 °F. Furnished standard with PVC hose.					
7650 OLP	3/8"	50'	300	1/4"	1/2"	19 3/4 x 7 x 20 1/4	43	\$375.00
7670 OLP	3/8"	70'	300	1/4"	1/2"	19 3/4 x 7 x 20 1/4	47	\$397.00
7850 OLP	1/2"	50'	300	3/8"	1/2"	19 3/4 x 7 x 20 1/4	47	\$388.00
7925 OLP	3/4"	25'	250	3/4"	3/4"	19 3/4 x 7 x 20 1/4	47	\$448.00
Medium Pressure Oil Reels			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R1T one wire braid hose.					
7850 OMP	1/2"	50'	3250	1/2"	1/2"	19 3/4 x 7 x 20 1/4	57	\$507.00
High Pressure Grease Reels			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R2T two wire braid hose.					
7650 OHP	3/8"	50'	4800	1/4"	1/2"	19 3/4 x 7 x 20 1/4	60	\$561.00

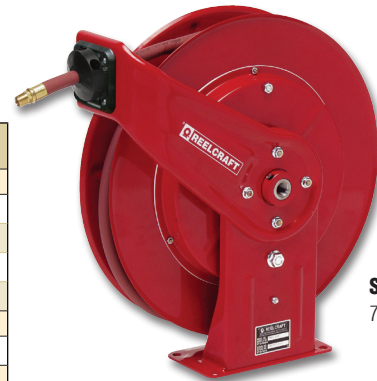

Series 7000
7850 OLP

Compact Spring Driven Dual Pedestal Reels

Series DP7000

Reelcraft's new Series DP7000 features a two-piece, non-welded, interlocking base that won't vibrate apart. Independent testing to military standards has proven DP7000 reels stand up to heavy vibration, making them ideal for truck mounted applications.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)	Price
Low Pressure Air/Water Reels			Maximum temperature 150 °F. Furnished standard with PVC hose.					
DP7650 OLP	3/8"	50'	300	1/4"	1/2"	16 1/2 x 8 x 17	50	\$439.00
DP7850 OLP	1/2"	50'	300	3/8"	1/2"	16 1/2 x 9 x 17	53	\$457.00
Medium Pressure Oil Reels			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R1T one wire braid hose.					
DP7850 OMP	1/2"	50'	3250	1/2"	1/2"	16 1/2 x 9 x 17	64	\$597.00
High Pressure Grease Reels			Maximum temperature 210 °F. Furnished standard with S.A.E. 100 R2T two wire braid hose.					
DP7650 OHP	3/8"	50'	4800	1/4"	1/2"	16 1/2 x 8 x 17	65	\$659.00



Series DP7000
DP7850 OLP

Many other sizes and models available as standard. Contact your local sales rep for more information.

773-585-7200

www.wholesaledirectinc.com

